

PLASFIX® ELECTRIC TRUNKING


Plasfix surface raceway system organizes and protects low voltage cables and routes them along interior walls

PRODUCT CONSTRUCTION

PROFILE	PVC
ADHESIVE (if applies)	Modified Acrylic Adhesive and Foam Carrier

FINISH

BLACK
 SILVER GREY
 SAPELLY WOOD GRAIN PAINT
 CHERRY TREE WOOD GRAIN PAINT
 OAK WOOD GRAIN PAINT
 WHITE

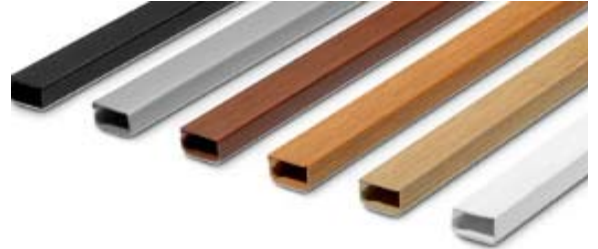

DIMENSIONS & REFERENCES

HINGE COVER / L: 2000 mm

Channel	Adhesive	W/O Adhesive	Available Colors
9x5	2405	-	WHITE, BLACK
12x7	2406	3401	WHITE, BLACK, OAK, CHERRY, SAPELLY
16x10	2407	3402	WHITE, BLACK, OAK, CHERRY, SAPELLY, GREY
21x11,5	2408	3403	WHITE, BLACK, OAK, CHERRY, SAPELLY, GREY
30x11,5	-	3404	WHITE, GREY

EXTRACTIVE COVER / L:2000 mm

Channel	Adhesive	W/O Adhesive	Available Colors
16x10	2600	3600	WHITE
16x16	2601	3601	WHITE
25x16	2602	3602	WHITE
35x16	-	3603	WHITE, GREY
53x20	-	3604	WHITE

HINGE COVER / L: 1160 mm

Channel	Adhesive	W/O Adhesive	Available Colors
9x5	2409	-	WHITE
12x7	2410	-	WHITE
16x10	2411	-	WHITE
21x11,5	2412	-	WHITE

FEATURES

Service Temperature: -5°C ÷ 60°C

Impact Protection: IPXX3 (Hinge Cover) / IPXX5 (Extractive Cover)

Suitable for electric wiring systems conforming to Low Tension Regulation

A range of linking accessories are available for the different finishes

It meets EU Regulation of the use of Hazardous Substances (ROHS)

It meets UNE-EN-50085-1 and directives 73/23 CEE - 93/68 CEE

Insulating and self-extinguishing material

